



**ALEX**

.110" Series Terminal Housings

1200T Series Crimp Terminal



1100T Series Crimp Terminal

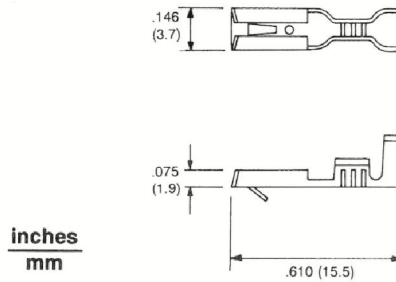



P/N	Applicable wires	Insulation O.D.	Material	Thickness	Finish
1100T1	0.5mm ² — 1.3mm ² AWG#20 — #16	3.1mm MAX	Brass	0.25mm	None
1100T2	0.3mm ² — 0.8mm ² AWG#22 — #18	2.1mm MAX	Brass	0.25mm	None
1200T1	0.8mm ² — 1.3mm ² AWG#18 — #16	3.1mm MAX	Brass	0.5 mm	None
1200T2	0.2mm ² — 0.5mm ² AWG#24 — #20	1.8mm MAX	Brass	0.5 mm	None

7120-N Series Housing

- Material: ABS (7120-N)
PA66 (7120-NL)
- 2, 3, 4, 6, 9 circuits available
- Standard color: natural
- Accepts 1200T terminal
- Mates with 7110-N series housing

7110-N Series Housing

- Material: ABS (7110-N)
PA66 (7110-NL)
- 2, 3, 4, 6, 9 circuits available
- Standard color: natural
- Accepts 1100T terminal
- Mates with 7120-N series housing

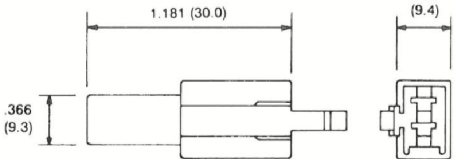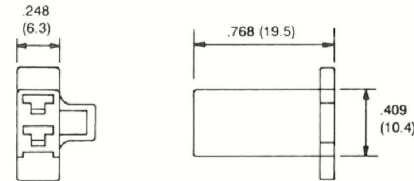Circuits	Max. Rated		Dimensional Information			
	Amps	Voltage	Plug		Receptacle	
2	5A	250V	7120-02 (W/O Lock) 7120-02L		7110-02 (W/O Lock) 7110-02L	
						



ALEX

Circuits	Max. Rated		Dimensional Information			
	Amps	Voltage	Plug		Receptacle	
3	5A	250V	7120-03 (W/O Lock) 7120-03L	<u>inches</u> <u>mm</u>	7110-03 (W/O Lock) 7110-03L	<u>inches</u> <u>mm</u>
4	5A	250V	7120-04 (W/O Lock) 7120-04L	<u>inches</u> <u>mm</u>	7110-04 (W/O Lock) 7110-04L	<u>inches</u> <u>mm</u>
6	5A	250V	7120-06 (W/O Lock) 7120-06L	<u>inches</u> <u>mm</u>	7110-06 (W/O Lock) 7110-06L	<u>inches</u> <u>mm</u>
9	5A	250V	7120-09 (W/O Lock) 7120-09L	<u>inches</u> <u>mm</u>	7110-09 (W/O Lock) 7110-09L	<u>inches</u> <u>mm</u>